

KPD679

16CH H.264 DVR


USB Mouse Control with GUI Display



▶ FEATURES

- ▶ **USB Mouse Control with GUI OSD**
 - The GUI OSD interface is provided and used with your USB mouse.
- ▶ **Intelligent Motion Trigger Recording**
 - Only the channel with an event will be recorded to effectively save a significant amount of hard disk space and have the maximized recording time.
 - Supports pre-alarm recording.
- ▶ **Remote Surveillance**
 - Mobile surveillance via our self-developed and free program, "EagleEye", is supported on many popular mobile platforms, such as iPhone, BlackBerry, WinCE, J2ME & Android.
 - Network surveillance via the licensed software "Video Viewer", Internet Explorer, Mozilla Firefox or Google Chrome web browser, and QuickTime player is supported with up to 5 users' login simultaneously.
- ▶ **Remote Independent Operation**
 - Channel switching & video playback are fully independent from the local site, allowing users to have private image monitoring remotely.
- ▶ **H.264 Video Compression Technology**
 - Highly improves video quality for live, recording, and network.
 - Recording file size is minimized for longest recording time.
 - Lower bit rate required for fastest network transfer.
- ▶ **Multiplex**
 - Allows live display, record, playback, backup and network operation at the same time.
- ▶ **Backup Function**
 - Supports USB flash drive and network backup.
- ▶ **Audio / Video Support**
 - 4 audio-in, 1 audio-out to record sounds.
 - VGA interface built-in.

▶ REAR PANEL

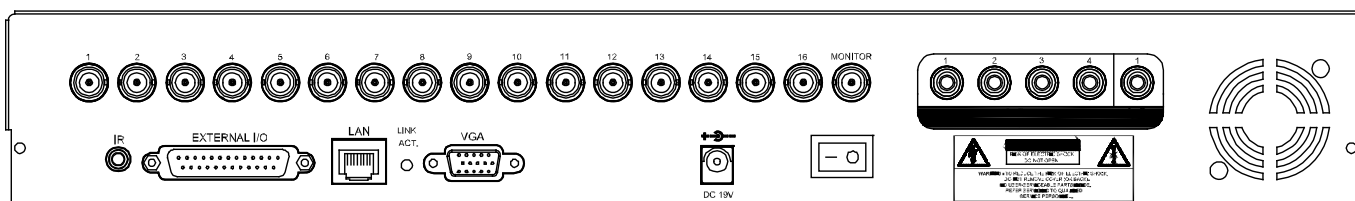

SPECIFICATIONS

Video System	NTSC / PAL (auto detection)	
Video Compression Format	H.264	
Video Input (Composite video signal 1 Vp-p 75Ω BNC)	16 channels	
Video Output (BNC)	Main Monitor Output: for stable display	
Audio Input / Output	4 audio inputs, 1 audio output (Mono)	
Maximum Recording Rate	Frame	704×480 pixels with 120 IPS <NTSC> / 704×576 pixels with 100 IPS <PAL>
	CIF	352×240 pixels with 480 IPS <NTSC> / 352×288 pixels with 400 IPS <PAL>
Image Quality Setting	SUPER BEST / BEST / HIGH / NORMAL	
Hard Disk Storage	Accommodates 2 SATA HDDs (1 HDD capacity up to 2TB)	
Quick Search	Time / Motion / Alarm search mode	
SATA Interface	Built-in	
VGA Interface	Built-in	
Recording Mode	Manual / Timer / Motion / Alarm / Remote	
Multiplex Operation	Live display / record / playback / backup / network operations	
USB Mouse Control	YES	
Motion Detection Area	16 × 12 grids per channel	
Motion Detection Sensitivity	3 adjustable parameters for accurate detection	
Pre-alarm Recording	YES	
Backup Device	USB 2.0 flash drive / Network	
Web Transmitting Compression Format	H.264	
Ethernet	10/100 Base-T. Supports remote control and live view via Ethernet	
Web Interface	Licensed software "Video Viewer" / Internet Explorer, Mozilla Firefox or Google Chrome web browser / QuickTime player (5 users access simultaneously) *Operating System: Windows 7 / Vista / XP / 2000	
Network Protocol	TCP/IP, PPPOE, DHCP and DDNS	
Basic Remote Independent Operation	YES	
Event Notification	By FTP & E-Mail	
R.E.T.R. (Remote Event Trigger Recording)	YES	
IR Remote Control	YES (IR receiver built-in)	
Mobile Surveillance	YES (Including iPhone, BlackBerry, WinCE, J2ME & Android)	
Picture Zoom	2X digital zoom	
PTZ Control	YES	
Alarm I/O	16 inputs, 1 output	
Key Lock (Password Protection)	YES	
User Level	Administrator & Operator	
Video Loss Detection	YES	
Camera Title	Supports up to 6 letters	
Video Adjustable	Hue / Saturation / Contrast / Brightness	
Date Display Format	YY/MM/DD, DD/MM/YY & MM/DD/YY	
Daylight Saving	YES	
Power Source (±10%)	DC 19V	
Power Consumption (±10%)	< 64 W	
Operating Temperature	10°C ~ 40°C (50°F ~104°F)	
Dimensions (mm)**	430(W) x 65(H) x 338(D)	
System Recovery	System auto recovery after power failure	
Optional Peripherals	Keyboard Controller	

*The specifications are subject to change without notice.

** Dimensional tolerance: ±5mm